

NEW

Smart Fiber Sensor
E3X-HD



OMRON

Measurement Discrimination Presence

Surprisingly Stable Detection with Your Finger tip

Exceptionally easy operation and stabilizing
technology reduce maintenance cost.



realizing

Communications Units are available.



EtherCAT

Stable

No Maintenance


Smart Power Control

Long-term stable detection with no maintenance

Smart Power Control function detects the decrease in light intensity due to LED aged deterioration and the decrease in incident level due to dirt, then automatically compensates the optimum detection condition. You get maintenance-free operation that withstands the ambient environments.



■ Maintenance-free operation by double compensation of light intensity and incident level

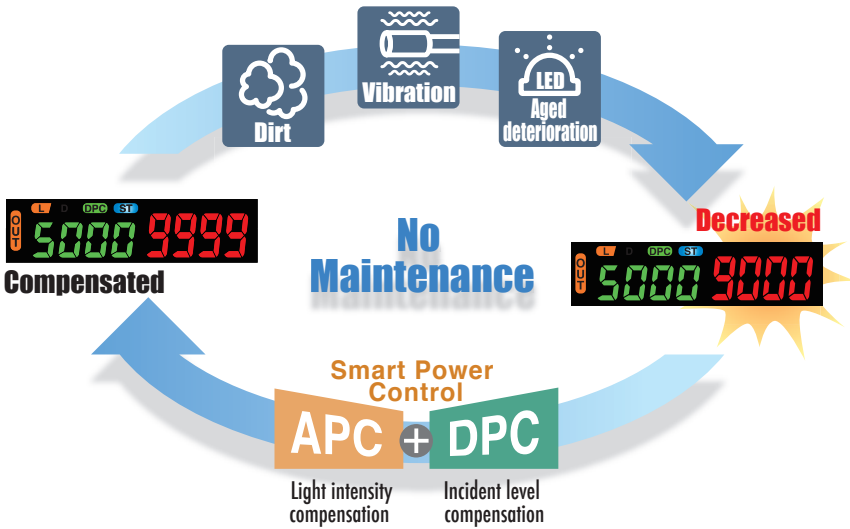


Detect Workpieces compensation without concern for Color and Size

Lighting element GIGA RAYⅡ is equipped that margin of detection on all scenes has been realized




Umparalleled power of GIGA RAYⅡ, with the highest level stably detects large workpieces and low-reflective workpieces such as black rubber whose detection was unstable before.


Long-distance detection for large workpieces

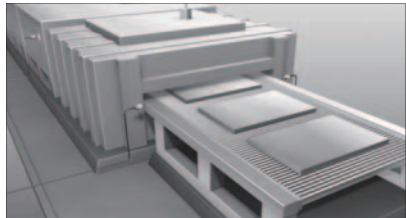

Detection in oily environments

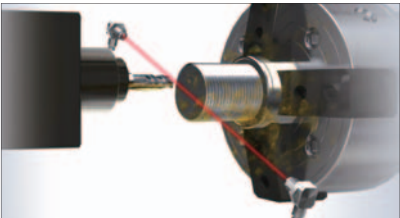

Detection in water and liquid medicine environments

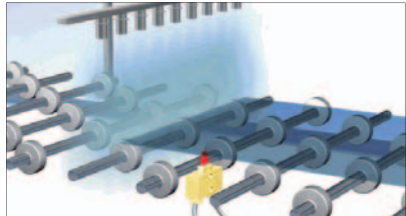

Detection of low-reflective workpieces such as black rubber



Use the Fiber Heads that are suitable for the application environment.



E3X-HD Series

[Stable] and [Easy] operation realized through Ultimate Usability

Stable

Smart Power Control Long-term stable detection with no maintenance

ONLY ONE 1

Even if the incident level is decreased due to dirt or mechanical vibration, Omron's proprietary Smart Power Control combines APC and DPC to automatically compensate the power so that high-precision detection with no maintenance is performed. And if compensation is not possible, the DPC indicator flashes to let you know that maintenance is required. You get reliable operation with long-term stable detection and visible abnormality.

Point



APC can be used always on for E3X-HD. The GIGA RAY II, which is described below, widely reduces the load with a low-power consumption LED. Furthermore comfortable long-term reliability has been realized.

OMRON's APC is the No.1 for long-term reliability!


Smart Power Control

APC

Always ON

(AUTO POWER CONTROL)


Automatically compensate light intensity

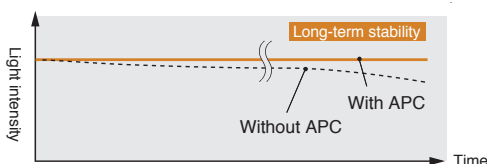

DPC



(DYNAMIC POWER CONTROL)

Automatically compensate incident level

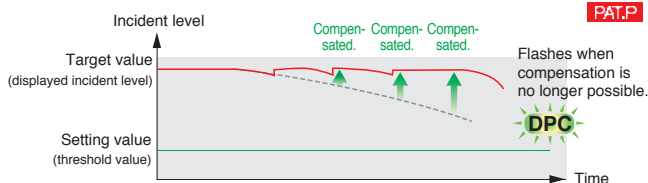

Advanced newly-developed GIGA RAY II for long-term stability and energy savings

The GIGA RAY has evolved into the newly-developed GIGA RAY II to achieve 1.5 times the power efficiency of conventional models. This effect is utilized to enhance APC service life for long-term stability and energy-saving effect more than enhancing the sensing distance. It contributes to the reliability and energy saving of your equipment.

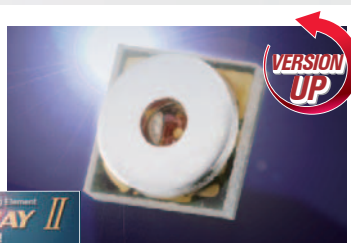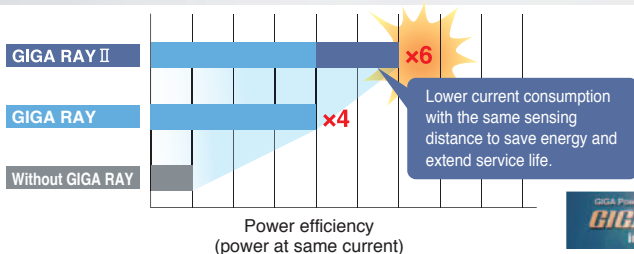

Maintenance cost is furthermore reduced! Open network is supported

- Greatly reduce wiring work for Fiber Amplifiers with zero-line connection.
- You can change settings from an external device to greatly reduce setup work.
- Connection of multiple units is available. (E3X-CRT: 16 units, E3X-ECT: 30 units)

CompoNet EtherCAT



E3X-CRT



E3X-ECT

Make the following search to access information on network standards and products.

Access keyword from search engines :

Omron Field Network



Easy

Consistent Settings for All Users


PAT.P

Smart Tuning Easy and optimum settings for anyone

Just press the **TUNE** button once with a workpiece and once without a workpiece to automatically set the optimum incident level and threshold regardless of the workpiece. The optimum settings can be performed regardless of skills and languages. The setting dispersion of the Sensors is also eliminated to enable smoothly shifting from trial production to mass production, which contributes to the reduction of introduction cost.



Easy Solution Fewer Setting Steps

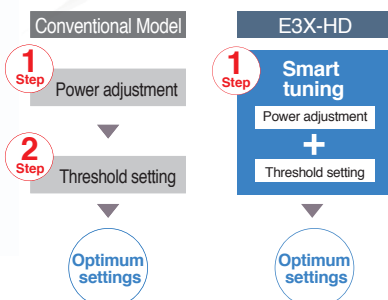

Easy Solution Optimum settings for saturated and low incident level

Setting of Smart Tuning

With workpiece Without workpiece

Press only twice.

Incident level adjustment with workpiece 9999

Incident level adjustment without workpiece 0

Threshold setting 5000 (Set to intermediate value between the incident levels with and without a workpiece.)

Settings are simultaneously completed.

Saturated incident level

Short distance

With workpiece Without workpiece

9999 9999

Smart Tuning

Optimum setting 8000 9999

With workpiece Without workpiece

Low incident level

Black rubber

With workpiece Without workpiece

600 100

Smart Tuning

Optimum setting 9999 1500

With workpiece Without workpiece


Point

Smart Tuning evolved from the popular power tuning feature of conventional Amplifiers, and yet is easier to use. It enables easily reproducing stable detection conditions by newcomers or by operators on a site of the factory overseas. The incident level is displayed without modification (0 to 9,999) to make it easier to understand and to provide operators with a sense of ease with the larger numbers.

Let the E3X-HD Help You Save Energy

Smart Eco Drive Contribute to energy saving of equipment

The increased power efficiency of the newly developed GIGA RAYII and the new circuit design reduce power consumption by 25% over conventional models. This supports saving energy and power in your equipment. Power consumption of only 720 mW has been realized in operation in Normal Mode. And there are no restrictions to sensing distance and response time.

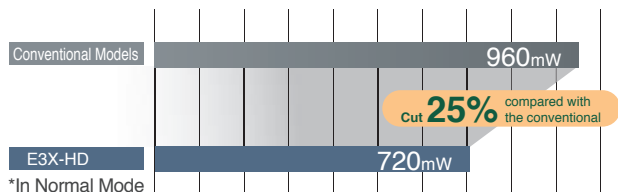

Point

You can use more Sensors with the same power supply capacity as before.


Easy

Greater operability and visibility are realized by a universal design


The universal design makes operation much easier and allows you to reliably communicate with operators when starting up or maintaining systems overseas.

Operations


Symbolic buttons are easy to remember anywhere even for operators overseas.

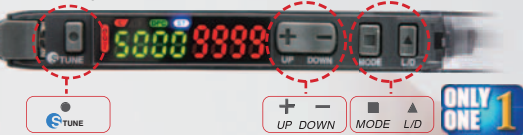

Compatibility for easy operation and incorrect operation prevention.



Pleasing operation even with gloves on.



Conventional Models
Sliding switches

E3X-HD
Pushbutton switches
(no sliding switches)

Smart Tuning

Smart tuning for the optimum settings with just one button.

Easy Fiber Insertion

Insertion performance is improved with a large insertion guide.

Point



Instruction Manuals are included in English, Japanese, and simplified Chinese.

Arc Design

A strong accent line gives a compact look to improve equipment design.

Easy-to-operate Cover

Cover with an overhanging structure for easy opening that clicks securely back in place.

Three-position Cover Stopper

Set to best of three positions: 90°, 135°, or 170°.

Space for I/O labels

Space for attaching I/O labels to make easy check.

Indications

Visibility is improved with digital displays and visible indicators.

New Concept: Visible Indicators

L

D

Operation mode indicator to prevent incorrect settings.

DPC

Flashing indicator enables preventive maintenance.

ST

Indicates that the optimum settings have been made.

OUT indicator

8888

8888

Threshold (green)




Incident level (red)



Ordering Information



E3X-HD Series


Amplifier Units

Type	Appearance	Connection method	Model	
			NPN output	PNP output
Standard models		Pre-wired (2 m)	E3X-HD11 2M	E3X-HD41 2M
		Wire-saving connector	E3X-HD6	E3X-HD8
		M8 connector	E3X-HD14	E3X-HD44
For Communications Unit connection		Communications Unit	E3X-HD0	

Wire-saving Connectors (Order Separately) (An Amplifier Unit with a wire-saving connector is required.)



Connectors are not provided with the Amplifier Units.

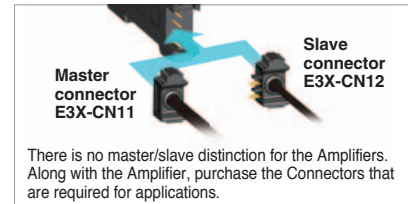Type	Appearance	Cable length	Number of conductors	Model
Master connector		2 m	3	E3X-CN11
Slave connector			1	E3X-CN12





Sensor I/O Connectors (Order Separately) (An Amplifier Unit with a M8 connector is required.)

Connectors are not provided with the Amplifier Units.

Appearance	Cable length	Number of conductors	Model
Straight 	2 m	4	XS3F-M421-402-A
Right-angle 			XS3F-M422-402-A

Communications Units

Communications method	Appearance	Applicable Fiber Amplifier Units	Model
CompoNet		E3X-HD0 E3X-MDA0 E3X-DA0-S	E3X-CRT
EtherCAT			E3X-ECT

Ratings and Specifications



Item	Type	Standard models			For Communications Unit
	NPN output	E3X-HD11	E3X-HD6	E3X-HD14	E3X-HD0
	PNP output	E3X-HD41	E3X-HD8	E3X-HD44	
Item	Connection method	Pre-wired	Wire-saving connector	M8 connector	Communications Unit connector
Light source (wavelength)		Red, 4-element LED (625 nm)			
Power supply voltage		12 to 24 VDC ±10%, ripple (p-p)10% max.			
Power consumption	Normal Mode	720mW max. (Current consumption: 30 mA max. at 24 VDC, 60 mA max. at 12 VDC)			
	Eco ON	530 mW max. (Current consumption: 22 mA max. at 24 VDC, 44 mA max. at 12 VDC)			
	Eco LO	640 mW max. (Current consumption 26 mA max. at 24 VDC, 53 mA max. at 12 VDC)			
Control output		Load power supply voltage: 26.4 VDC max., open-collector output Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 16 Amplifier Units: 20 mA max. Residual voltage: At load current of less than 10 mA: 1 V max., At load current of 10 to 100 mA: 2 V max. OFF current: 0.1 mA max.			—
Protective circuits		Reverse power supply connection protection, output short-circuit protection, and reverse output connection protection			
Response time	Super-high-speed Mode (SHS)	NPN output: Operate or reset: 50 μs PNP output: Operate or reset: 55 μs			—
	High-speed Mode (HS)	Operate or reset: 250 μs			
	Standard Mode (STND)	Operate or reset: 1 ms			
	Giga-power Mode (GIGA)	Operate or reset: 16 ms			
Mutual interference prevention		Possible for up to 10 units			
Maximum connectable Units		16 units			with E3X-CRT: 16 units with E3X-ECT: 30 units

OMRON Corporation Industrial Automation Company
Tokyo, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.
Sensor Business Unit
Carl-Benz-Str. 4, D-71154 Nufringen, Germany
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

OMRON ELECTRONICS LLC
One Commerce Drive Schaumburg,
IL 60173-5302 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.
No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2011 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_4_1_0714
Cat. No. E417-E1-01

Printed in Japan
1111 (1111) (W)