

LYSITHEA - Double eccentric butterfly valve DN400-2200 (3000)

Description


The LYSITHEA is a double eccentric butterfly valve for all kind of water and other non aggressive fluids.
It is available with gear or electric actuator.

Product features

	PN10/16	PN25	PN40
• Diameters	DN 400 - 2200 (DN 2400 - 3000 on request)	DN400-800 (DN 900 - 1200 on request)	DN400-800
• Face to face dimension	acc. to ISO 5752 series 14 (EN 558-1 series 14, DIN 3202 F4)	acc. to ISO 5752 series 14 (EN 558-1 series 14, DIN 3202 F4)	acc. to ISO 5752 series 15 (EN 558-1 series 15, DIN 3202 F5)
• Max. working pressure	10/16 bar	25 bar <70°C 16 bar <200°C	40 bar <70°C 25 bar <200°C
• Rating	PN10, PN16, ANSI cl.150	PN25, ANSI cl.300	PN40, ANSI cl.300
• Top flange	according to EN ISO 5211		
• Temperature range	90°C (EPDM), 200°C (FPM)		

Material specification

Item	Description	Material	
1+3	Body + Disc	PN10/16/25	EN-GJS-400-15, GGG40
		PN40	S235JR, St37.2
2	Body seat surface	CrNi-Plasma	
4	Seat	EPDM, FPM	
5	Shaft	X20Cr13, 1.4021	
6	Bearing bush	CC480K, CuSn10	

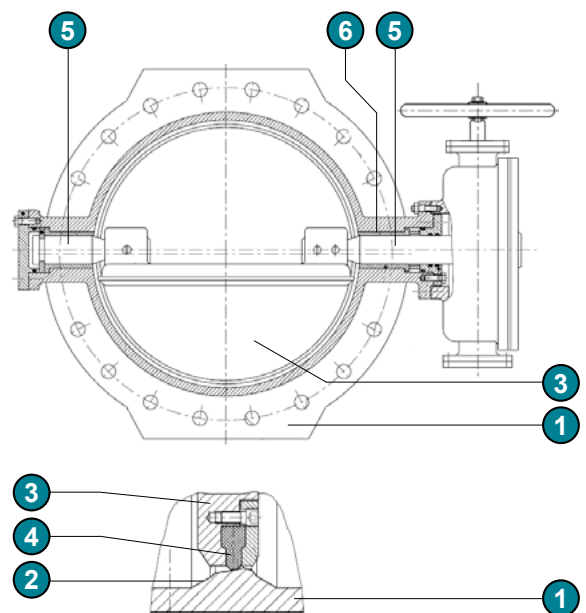


Torques [Nm]

DN ->	400	450	500	600	700	800	900	1000	1100	1200	1400	1600	1800	2000	2200
PN10	1471	1872	2593	3907	5498	7926	10148	13467	17274	21797	32306	46829	64084	87231	112637
PN16	2148	2736	3800	5734	8054	11680	14939	19876	26935	32159	47681	69017	106340	140397	181990
PN25	3200	4600	5800	9500	14400	24000									
PN40	4950	6710	9240	15730	23980	38170									

LYSITHEA - Double eccentric butterfly valve DN400-2200 (3000)

Kv values [m³/h]

DN	PN10	PN16	PN25	PN40
400	12000	10700	8320	6240
450	16000	13500	10500	8060
500	20600	16700	13000	9950
600	29700	24100	18700	14300
700	40400	32800	25500	20600
800	52800	42800	33300	27600
900	66900	55000		
1000	82500	67900		
1100	99900	86300		
1200	119000	103500		
1400	162000	140300		
1600	211000	183500		
1800	280000	246600		
2000	354000	308000		
2200	440000	383000		

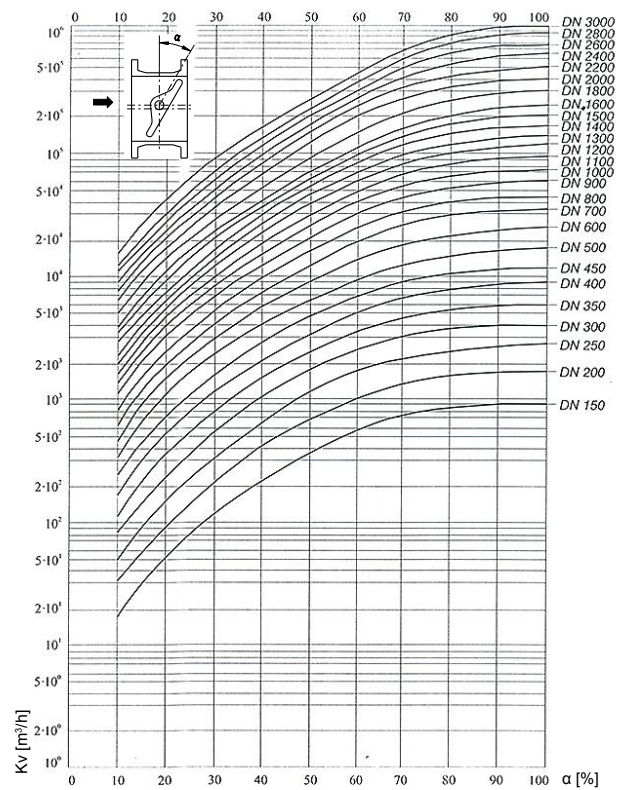


Type code

L6M	1000	.	3	3	-	2AR	.	4A	.	2AR	.	E
①	②		③	④		⑤		⑥		⑦		⑧

①	Type	L6M	Double eccentric butterfly valve LYSITHEA
②	Nominal diameter	0400 - 2200	mm
③	Working pressure	2	10 bar DN400-2200
		3	16 bar DN400-2200
		5	25 bar DN400-800
		6	40 bar DN400-800
④	Rating	2	PN10 DN400-2200
		3	PN16 DN400-2200
		5	PN25 DN400-800
		6	PN40 DN400-800
⑤	Body material	2AR	GGG40 / EN-GJS-400-15 (Resicoat 250 µm) PN10/16/25
		2AV	GGG40 / EN-GJS-400-15 / EPDM lined (with WRAS approval) PN10/16/25
		3CR	S235JR, St37.2, 1.0037 (Resicoat 250 µm) PN40
⑥	Shaft	4A	X20Cr13 / 1.4021 / AISI 420
⑦	Disc	2AR	GGG40 / EN-GJS-400-15 / GGG 40 (Resicoat 250 µm) PN10/16/25
		2AV	GGG40 / EN-GJS-400-15 / GGG 40 EPDM lined (with ACS approval) PN10/16/25
		3CR	S235JR, St37.2, 1.0037 (Resicoat 250 µm) PN40
		4C0	Stainless steel 1.4408 / AISI 316 PN10/16/25
⑧	Seat	E	EPDM (with WRAS approval)
		V	FPM

Other executions on request (DN2400-3000, other materials for body, disc and seat)

Dimensions PN10/16/25

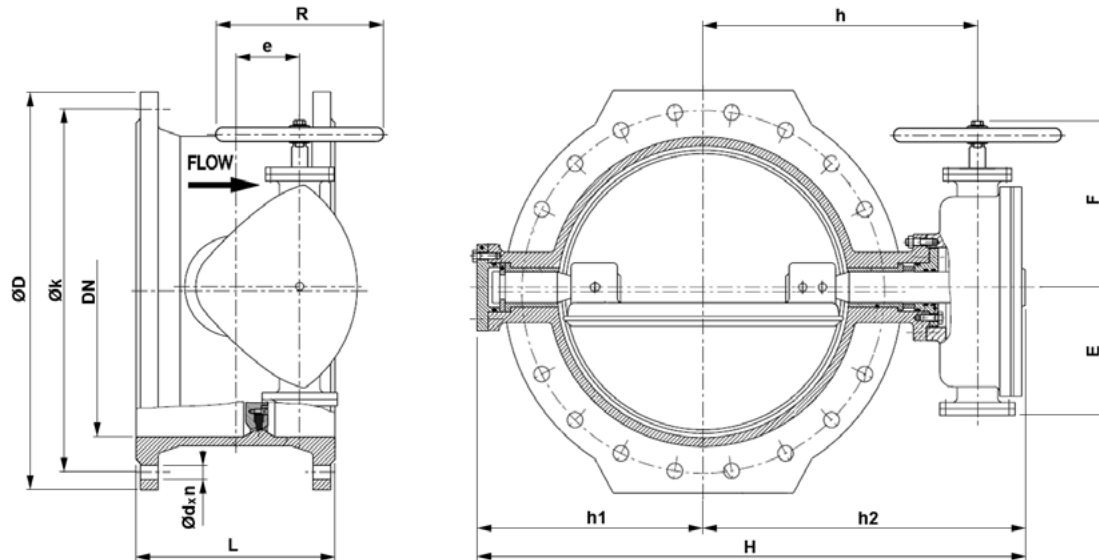


PN10	DN	L	D PN10	k x n x d PN10	E	F	e	h	h ₁	h ₂	H	R	ISO 5211	n *	kg PN10
	400	310	565	515x16x28	200	250	85	433	345	550	895	320	F12	28	228
	450	330	615	565x20x28	200	250	85	458	375	560	935	320	F14	28	285
	500	350	670	620x20x28	295	390	145	537	445	680	1125	500	F14	36	415
	600	390	780	725x20x31	295	390	145	597	515	745	1260	500	F16	36	566
	700	430	895	840x24x31	430	540	230	632	525	807	1332	640	F25	50	730
	800	470	1015	950x24x34	430	540	230	750	655	937	1592	640	F25	50	1020
	900	510	1115	1050x28x34	430	540	230	799	710	987	1697	640	F30	50	1350
	1000	550	1230	1160x28x37	430	540	230	865	760	1052	1812	640	F30	50	1790
	1100	590	1340	1270x32x37	430	540	230	765	810	1100	1910	640	F30	50	1920
	1200	630	1455	1380x32x41	430	540	230	810	855	1142	1997	640	F30	50	2070
	1400	710	1675	1590x36x44	375	830	400	983	975	1252	2227	640	F30	268	3600
	1600	790	1915	1820x40x50	375	830	400	1280	1100	1392	2492	640	F35	268	4700
	1800	870	2115	2020x44x50	375	830	400	1490	1280	1572	2852	640	F40	268	5600

PN16	DN	L	D PN16	k x n x d PN16	E	F	e	h	h ₁	h ₂	H	R	ISO 5211	n *	kg PN16
	400	310	580	525x16x31	200	250	85	433	345	550	895	320	F12	28	251
	450	330	640	585x20x31	200	250	85	458	375	560	935	320	F14	28	314
	500	350	715	650x20x34	295	390	145	537	445	680	1125	500	F14	36	457
	600	390	840	770x20x37	295	390	145	597	515	745	1260	500	F16	36	623
	700	430	910	840x24x37	430	540	230	632	525	807	1332	640	F25	50	803
	800	470	1025	940x24x41	430	540	230	750	655	937	1592	640	F25	50	1122
	900	510	1125	1050x28x41	430	540	230	799	710	987	1697	640	F30	50	1485
	1000	550	1255	1170x28x44	430	540	230	865	760	1052	1812	640	F30	50	1969
	1100	590	1355	1270x32x44	430	540	230	765	810	1100	1910	640	F30	50	2112
	1200	630	1485	1390x32x50	430	540	230	810	855	1142	1997	640	F30	50	2277
	1400	710	1685	1590x36x50	375	830	400	983	975	1252	2227	640	F30	268	3960
	1600	790	1930	1820x40x57	375	830	400	1280	1100	1392	2492	640	F35	268	5170
	1800	870	2130	2020x44x57	375	830	400	1490	1280	1572	2852	640	F40	268	6160

PN25	DN	L	D PN25	k x n x d PN25	E	F	e	h	h ₁	h ₂	H	R	ISO 5211	n *	kg PN25
	400	310	620	550x16x37	200	250	85	433	345	550	895	320	F12	28	228
	450	330	685	600x20x37	200	250	85	458	375	560	935	320	F14	28	285
	500	350	730	660x20x37	295	390	145	537	445	680	1125	500	F14	36	415
	600	390	845	770x20x41	295	390	145	597	515	745	1260	500	F16	36	566
	700	430	960	875x24x44	430	540	230	632	525	807	1332	640	F25	50	730

* n = Handwheel turns ON/OFF

Dimensions PN40

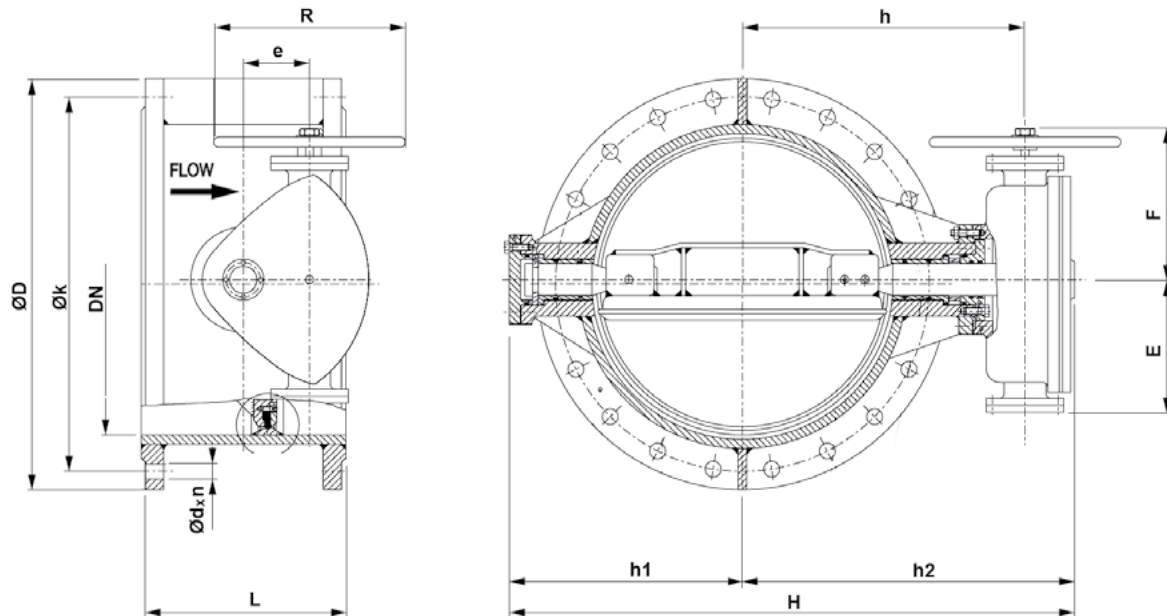

	DN	L	D PN40	k x n x d PN40	E	F	e	h	h ₁	h ₂	H	R	ISO 5211	n *	kg PN25
PN40	400	600	660	585x16x41	200	250	85	433	345	550	895	320	F12	36	600
	450	650	685	610x20x41	200	250	85	458	375	560	935	320	F14	36	680
	500	700	755	670x20x45	295	390	145	537	445	680	1125	500	F14	50	790
	600	800	890	795x20x50	295	390	145	597	515	745	1260	500	F16	50	1210
	700	900	995	900x24x50	430	540	230	632	525	807	1332	640	F25	50	1680
	800	1000	1140	1030x24x57	430	540	230	750	655	937	1592	640	F25	50	2340

InterApp AG
Grundstrasse 24
CH-6343 Rotkreuz
Phone +41 (0) 41 7982233
Fax +41 (0) 41 7982234
info@ch.interapp.net

InterApp Germany
AVK Mittelmänn Armaturen
Schillerstrasse 50
D-42489 Wülfrath
Phone +49 (0) 2058 901 01
Fax +49 (0) 2058 901 110
info@avkmittelmänn.com

InterApp Austria
Kolpingstrasse 19
A-1230 Wien
Phone +43 (0) 1 6162371-0
Fax +43 (0) 1 6162371-99
info@at.interapp.net

InterApp Italy
Via Gramsci 29
I-20016 Pero (MI)
Phone +39 02 339371
Fax +39 02 33937200
info@it.interapp.net

InterApp Válvulas
Calderón de la Barca 12
E-28860 Paracuellos de Jarama
Phone +34 (0) 91 6584360
Fax +34 (0) 91 6581430
info@es.interapp.net

AVK Válvulas
Poligono Industrial
Francoli, parcela 27
E-46006 Tarragona
Phone +34 977 543 008
Fax +34 977 541 622
avk@avkvalvulas.com

InterApp Singapore
11, Changi North Street 1, #03-11
Singapore 498823
Phone +65 62141048
Fax +65 62140481
info@sg.interapp.net

The technical data are noncommittal and do not assure you of any properties. Please refer to our general sales conditions. Modifications without notice.

© 2009 InterApp AG, all rights reserved