


# Series W directly operated solenoid valves

3/2-way monostable NC and NO, monostable. The solenoid valves can be mounted on a single base (with M5 ports) as well as on manifolds (with M5 ports or cartridge  $\varnothing$  3 and 4).

- » Electrical connection according to DIN 43650
- » High flow rate

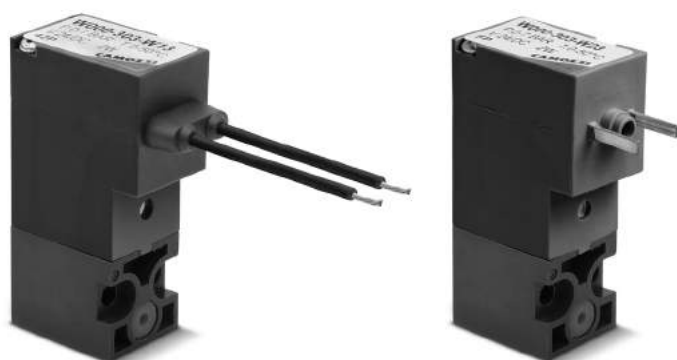

Series W directly operated solenoid valves are available as 3/2-way either NC or NO. Both versions can be mounted on single sub-bases or manifolds and they are equipped with a manual override which make the plants setting easier.

## GENERAL DATA

### TECHNICAL FEATURES

Function	3/2 NC - 3/2 NO
Operation	direct acting poppet type
Pneumatic connections	on subbase, ISO 15218 interface by means of screws
Nominal diameter	0.8 ... 1.5 mm
Nominal flow	14 ... 35 NI/min (air @ 6 bar $\Delta$ P 1 bar)
Kv (l/min)	0.22 ... 0.54
Operating pressure	0 ÷ 5 ... 10 bar
Operating temperature	0 ÷ +50°C
Media	filtered air, class 5.4.4 according to ISO 8573-1 (max oil viscosity 32 cSt), inert gas
Response time	ON <10 msec - OFF <15 msec
Manual override	monostable button
Installation	in any position

### MATERIALS IN CONTACT WITH THE MEDIUM

Body	PBT technopolymer
Seals	PU, NBR, (FKM on demand)
Internal parts	stainless steel

### ELECTRICAL FEATURES

Voltage	12 V DC - 24 V DC - 48 V DC
Voltage tolerance	±10%
Power consumption	2 W - 1 W (24 V DC only)
Duty cycle	ED 100%
Electrical connection	DIN 43650 connector, (C Shape), 8 mm
Protection class	IP65 with connector

### Special versions available on demand


## CODING EXAMPLE

W	0	00	-	3	0	3	-	W	2	3	
<b>W</b>	SERIES										
<b>0</b>	BODY DESIGN: 0 = single sub-base (only M5) or interface 1 = single manifold 2 = double manifold										
<b>00</b>	NUMBER OF POSITIONS: 00 = interface 01 = single base (M5 only) 02 + 99 = manifold number of positions										
<b>3</b>	NUMBER OF WAYS - FUNCTIONS: 0 = manifold or single sub-base 3 = 3-way NC 4 = 3-way NO 5 = 3-way NC electric part revolved by 180° 6 = 3-way NO electric part revolved by 180°										
<b>0</b>	VALVE PORTS: 0 = interface  MANIFOLD PORTS (for Series W, P and PN): 2 = M5 side 3 = tube ø 3 side 4 = tube ø 4 side 6 = M5 rear ports 7 = ø 3 tube rear ports 8 = ø 4 tube rear ports										
<b>3</b>	NOMINAL DIAMETER - MAX PRESSURE 1 = ø 0,8 (1W)      10 bar (NC) 24V only 3 = ø 1,5 (2W)      7 bar (NC) 5 bar (NO) 5 = ø 1,1 NC (2W)    10 bar (NC) ø 0,9 NO (2W)    10 bar (NO)										
<b>W</b>	MATERIALS: W = technopolymer PBT body, FKM poppet seal, other seals in NBR (FKM on demand)										
<b>2</b>	ELECTRICAL CONNECTION: 1 = cables 300mm (24V DC only) 2 = 2 faston (24V - 48V DC)										
<b>3</b>	SOLENOID VOLTAGE: 2 = 12V DC 3 = 24V DC 4 = 48V DC										
	FIXING: = with screws for metal (standard) P = with screws for plastics										



### 3/2-way NC solenoid valve, 2 faston (24V DC - 48V DC)

Supplied with:  
 1x interface seal  
 2x screws M3x20 UNI 8112 (for standard version)  
 or  
 2x screws M3x23 UNI 10227 (for version P)

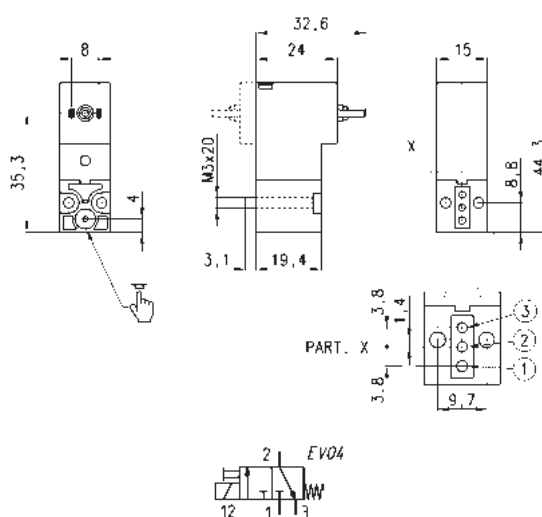


Mod.	Orifice Ø (mm)	Qn (NI/min)	Pressure min-max (bar)
<b>W000-305-W23</b>	1.1	25	0 ÷ 10
<b>W000-303-W23</b>	1.5	35	0 ÷ 7
<b>W000-305-W24</b>	1.1	25	0 ÷ 10
<b>W000-303-W24</b>	1.5	35	0 ÷ 7



### 3/2-way NO solenoid valve, 2 faston (24V DC - 48V DC)

Supplied with:  
 1x interface for NO version  
 (connections 1 and 3 are inverted)  
 2x interface seals  
 2x screws M3x25 UNI 8112 (for standard version)

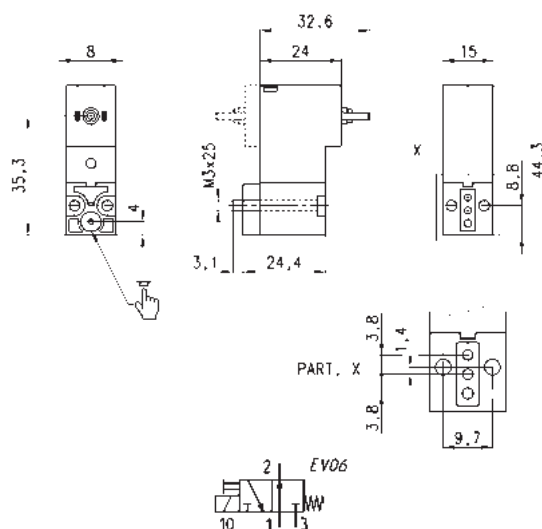


Mod.	Orifice Ø (mm)	Qn (NI/min)	Pressure min-max (bar)
<b>W000-405-W23</b>	0.9	15	0 ÷ 10
<b>W000-403-W23</b>	1.5	23	0 ÷ 5
<b>W000-405-W24</b>	0.9	15	0 ÷ 10
<b>W000-403-W24</b>	1.5	23	0 ÷ 5



### 3/2-way NC solenoid valve with cables of 300mm (24V DC only)

Supplied with:  
 1x interface seal  
 2x screws M3x20 UNI 8112 (for standard version)  
 or  
 2x screws M3x23 UNI 10227 (for version P)

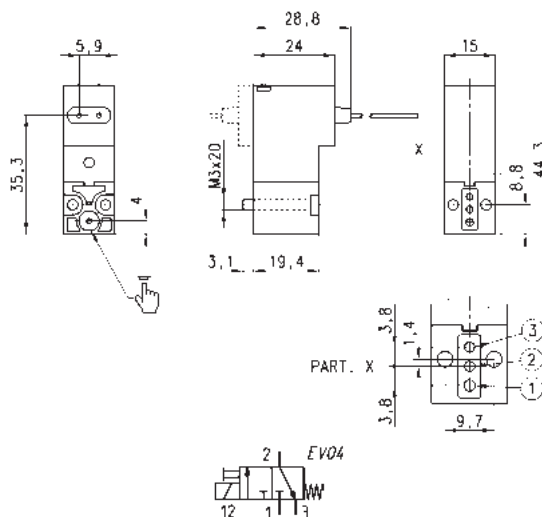


Mod.	Orifice Ø (mm)	Qn (NI/min)	Pressure min-max (bar)
<b>W000-305-W13</b>	1.1	25	0 ÷ 10
<b>W000-303-W13</b>	1.5	35	0 ÷ 7



### 3/2-way NO solenoid valve with cables of 300mm (24V DC only)


Supplied with:  
1x interface for NO version  
(connections 1 and 3 are inverted)  
2x interface seals  
2x screws M3x25 UNI 8112 (for standard version)

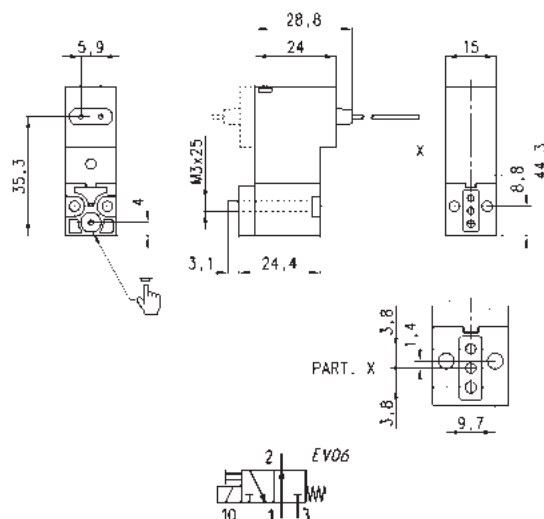

Mod.	Orifice Ø (mm)	Qn (NI/min)	Pressure min-max (bar)
<b>W000-405-W13</b>	0.9	15	0 ÷ 10
<b>W000-403-W13</b>	1.5	25	0 ÷ 5



### Single manifold with rear outlets

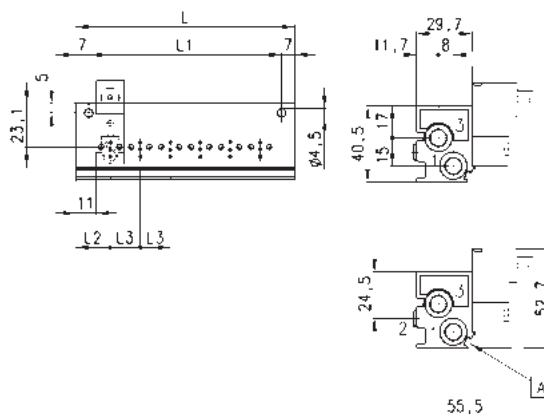

DIMENSIONS							
Mod.	N° Valves	L	L1	L2	L3	1 (P)	3 (R)
<b>P102-0*</b>	2	53	39	18,5	16	G1/8	G1/8
<b>P103-0*</b>	3	69	55	18,5	16	G1/8	G1/8
<b>P104-0*</b>	4	85	71	18,5	16	G1/8	G1/8
<b>P105-0*</b>	5	101	87	18,5	16	G1/8	G1/8
<b>P106-0*</b>	6	117	103	18,5	16	G1/8	G1/8


\* = see the type of PORTS in the CODING EXAMPLE TABLE.

A = groove for electric connection identification



### Single manifold with front outlets

This manifold is arranged to be fixed through DIN 46277/3 guide together with the accessory PCF-E520.

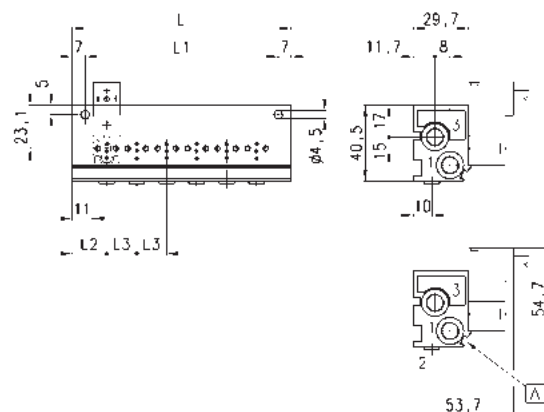


DIMENSIONS							
Mod.	Nr valves	L	L1	L2	L3	1 (P)	3 (R)
<b>P102-0*</b>	2	53	39	18,5	16	G1/8	G1/8
<b>P103-0*</b>	3	69	55	18,5	16	G1/8	G1/8
<b>P104-0*</b>	4	85	71	18,5	16	G1/8	G1/8
<b>P105-0*</b>	5	101	87	18,5	16	G1/8	G1/8
<b>P106-0*</b>	6	117	103	18,5	16	G1/8	G1/8

\* = see the type of PORTS in the CODING EXAMPLE TABLE.

A = groove for electric connection identification

## Double sided manifold with rear outlets

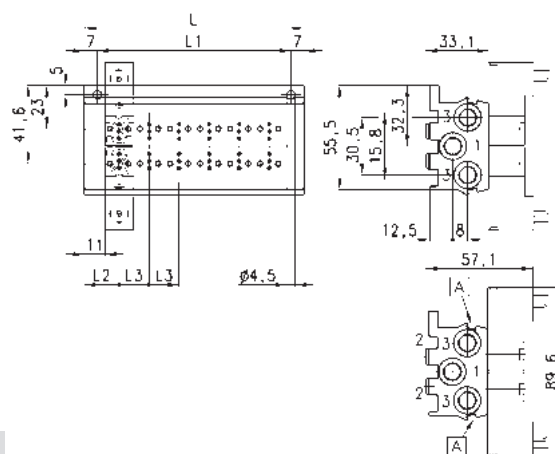

## DIMENSIONS


Mod.	Nr valves	L	L1	L2	L3	1 (P)	3 (R)
<b>P204-0*</b>	4	53	39	18,5	16	G1/8	G1/8
<b>P206-0*</b>	6	69	55	18,5	16	G1/8	G1/8
<b>P208-0*</b>	8	85	71	18,5	16	G1/8	G1/8
<b>P210-0*</b>	10	101	87	18,5	16	G1/8	G1/8
<b>P212-0*</b>	12	117	103	18,5	16	G1/8	G1/8

\* = see the type of PORTS in the CODING EXAMPLE TABLE.

A = groove for electric connection identification

## Double sided manifold with front outlets

This manifold is arranged to be fixed through DIN 46277/3 guide together with the accessory PCF-E520.

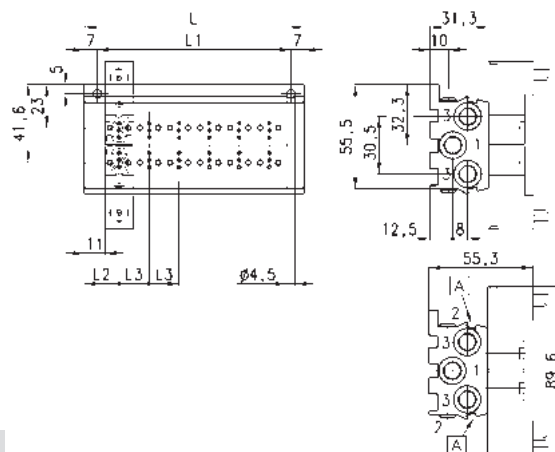

## DIMENSIONS


Mod.	Nr valves	L	L1	L2	L3	1 (P)	3 (R)
<b>P204-0*</b>	4	53	39	18,5	16	G1/8	G1/8
<b>P206-0*</b>	6	69	55	18,5	16	G1/8	G1/8
<b>P208-0*</b>	8	85	71	18,5	16	G1/8	G1/8
<b>P210-0*</b>	10	101	87	18,5	16	G1/8	G1/8
<b>P212-0*</b>	12	117	103	18,5	16	G1/8	G1/8

\* = see the type of PORTS in the CODING EXAMPLE TABLE.

A = groove for electric connection identification

## Connector Mod. 126-... DIN 43650 pin spacing 8 mm

To be used in all DC valves with voltages from 6 to 110 V.

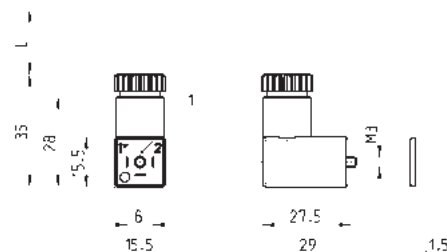

1 = 90° adjustable connector

Mod.	description	colour	working voltage	cable length [ L ]	cable holding	tightening torque
<b>126-550-1</b>	moulded cable, without electronics	black	-	1000 mm	-	0.3 Nm
<b>126-800</b>	connector, without electronics	black	-	-	PG7	0.3 Nm
<b>126-701</b>	connector, varistor + Led	transparent	24 V AC/DC	-	PG7	0.3 Nm